

## LEVEL 3

## OVERVIEW FLOOR PLAN





# LEVEL 3 FLOOR LOADING



## Specifications

### Floor Load Capacity

- 5.0KN/m<sup>2</sup> (100lb/ sq ft)
- 5.0KN/m<sup>2</sup> (100lb/ sq ft)
- 10.0KN/m<sup>2</sup> (200lb/ sq ft)

### Floor Surface

Meeting Rooms: Carpet  
Foyers: Carpet  
Concourse/Link: Granite

### Vehicular Access Ramp

Width of Individual Driveway: 600mm  
Diameter of Ramp: 26,298mm  
Maximum Clearance Height: 4,000mm

# LEVEL 3 CEILING HEIGHT PLAN




## Ceiling Height

All dimensions are calculated in mm

2200	2500	2700	2900	3000	3100
------	------	------	------	------	------

# LEVEL 3 LIGHTING PLAN

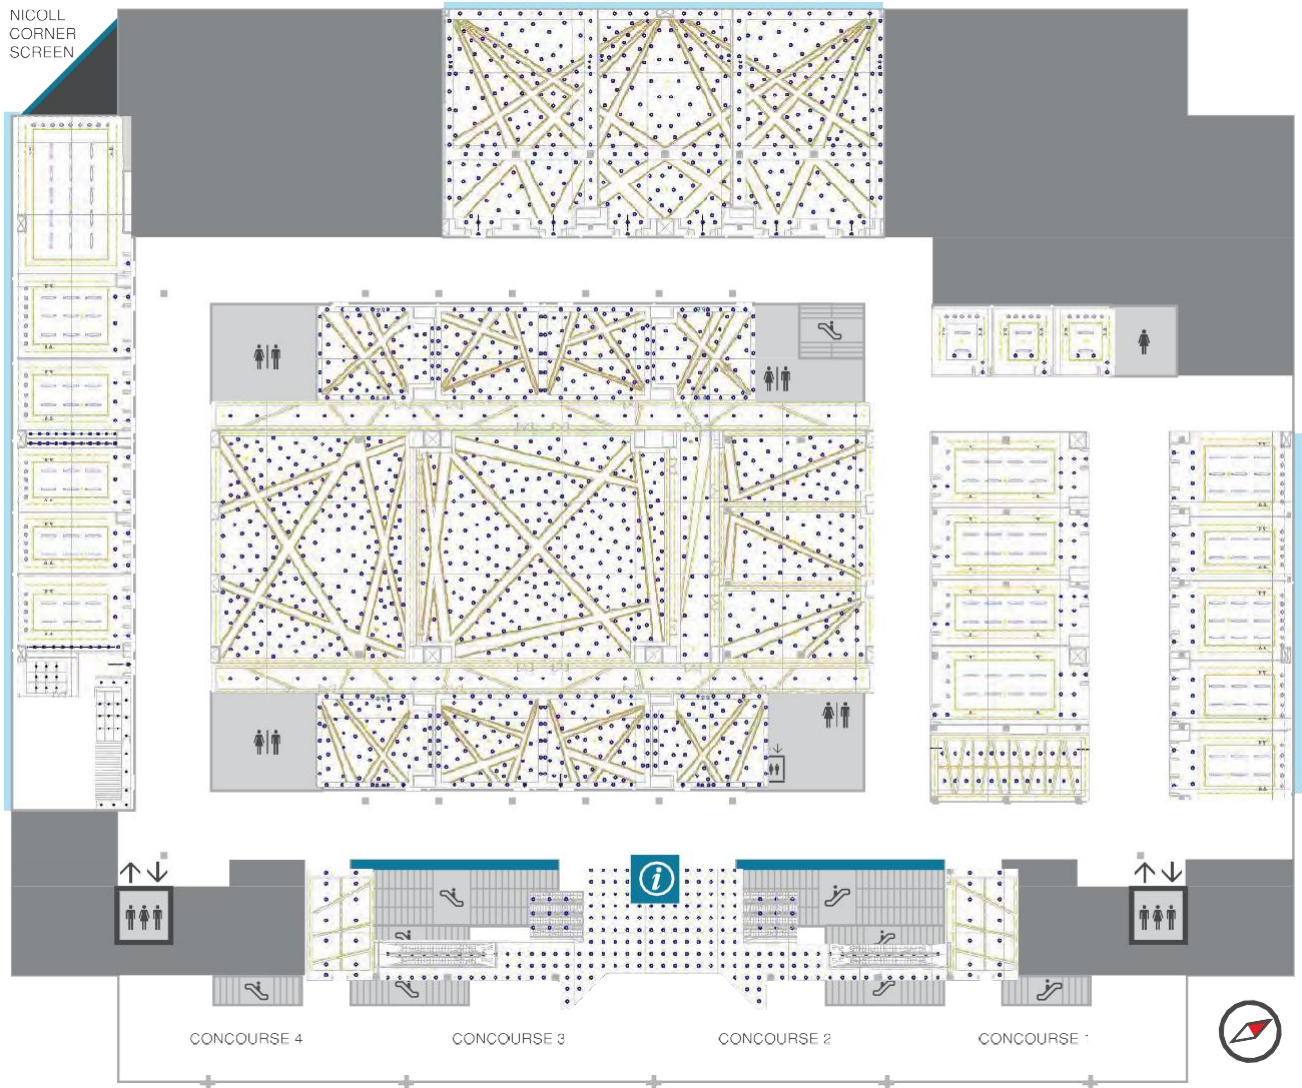

## Lighting Legend

- Downlight
- Wall Washer
- Adjustable Spotlight on Track
- Universal Sensor
- Cove Lighting
- Perimeter Lighting
- Linear Light with Downlight



## In-Room Control Selection



AUDIO



AIRCON



LIGHTING




BLINDS

In-room touch panels allow users to control the lighting, air-conditioning, background music and blinds.



# LEVEL 3

## LIGHTING DETAILS

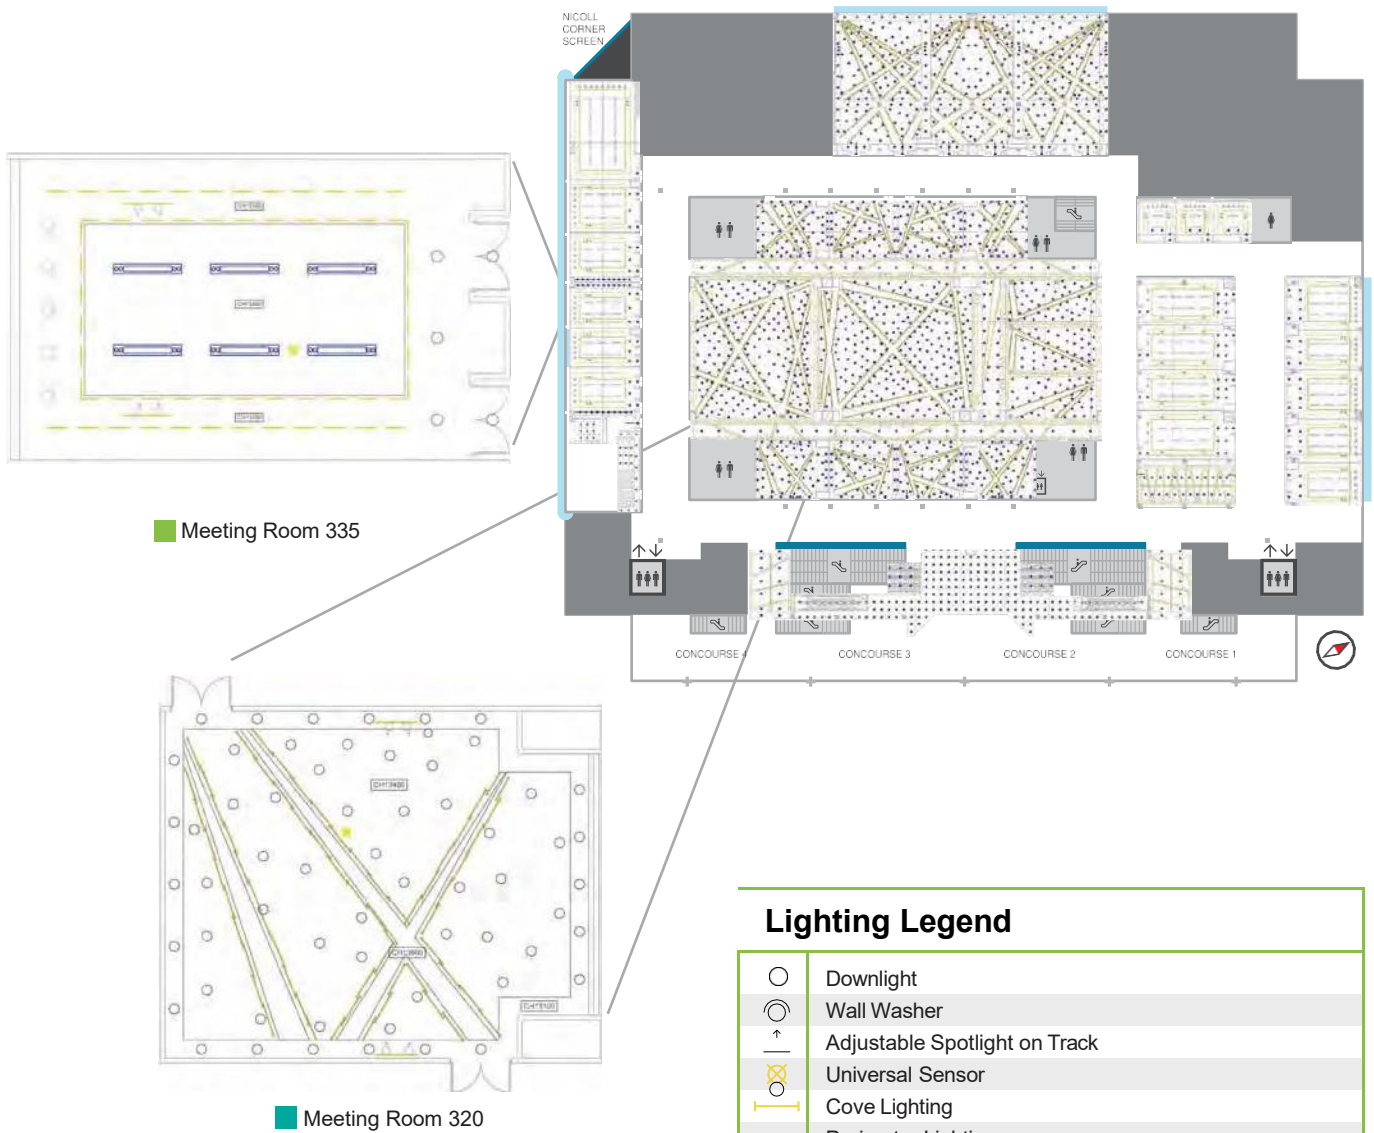

# LEVEL 3

## ELECTRICAL POINTS




### Legend

- 13-AMP Wall Powerpoints
- 13-AMP Floor Powerpoints
- 15-AMP Wall Powerpoints
- 32-AMP Wall Powerpoints



# LEVEL 3 WALL & DOOR SPECIFICATION

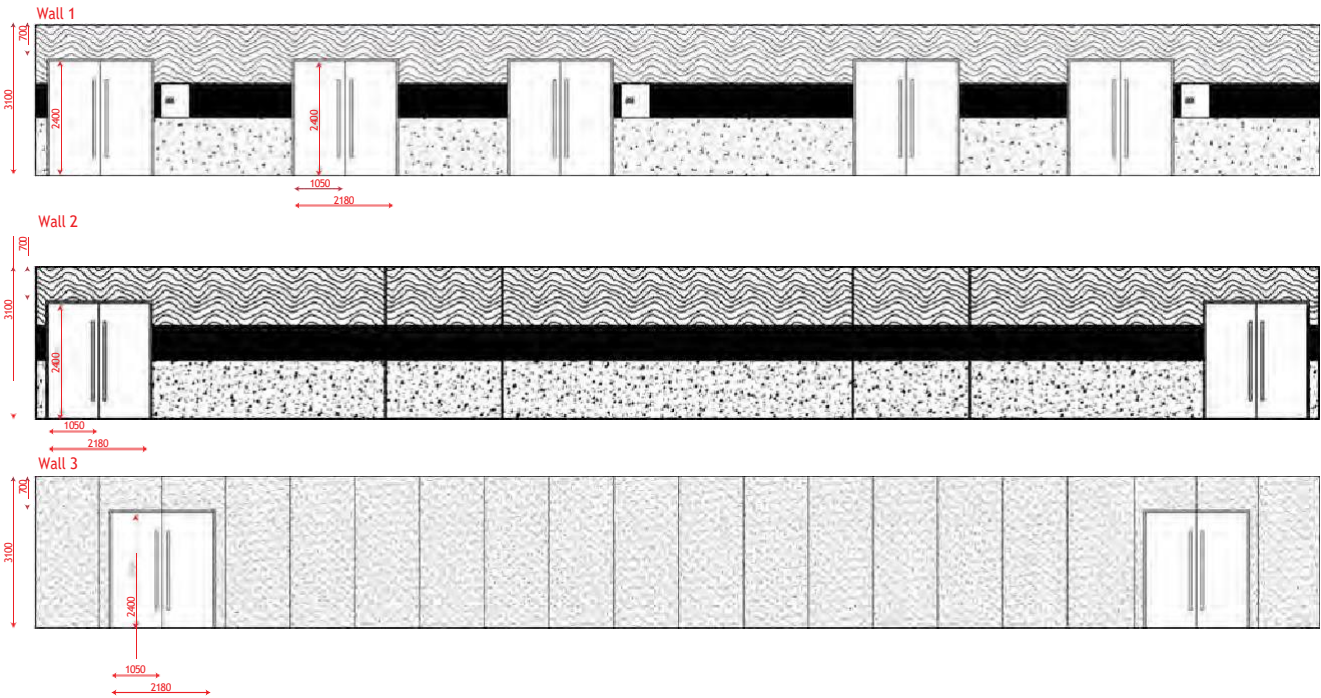

Soundproofing specifications for operable wall: 55dB





**Suntec**  
SINGAPORE  
Convention & Exhibition Centre

The Preferred Place to Meet

# FIRE SAFETY FLOOR PLAN

## LEVEL 3



Dry Riser

Fire Extinguisher

Fire Hose Reel